

ES-6180DAB 1Din Multimedia tuner

AM/FM Receiver with USB, microSD, AUX IN and Bluetooth

Reference **7137574**

















DIGITALEADIO



Technical Specifications

EEPROM INSIDE

backup memory for keeping head unit settings and stored channels when battery is disconnected

DAB/DAB+ TUNER

III Band (174 — 240 MHz)
Preset Station Memory 18x (DAB 1, DAB 2, DAB 3)
Quick Search

AM/FM TUNER

RDS World Tuner FM Band (87.5 – 108MHz) / AM (MW) Band (522 — 1620KHz) PTY / TP /TA (Traffic Announcement) / AF (Alternative Frequency) Preset Station Memory 18x FM, 12x AM

PLAYBACK

MP3 / WMA / FLAC ID3 Tag (Artist / Album / Track) Repeat / Random Play

AMPLIFIER

Mosfet Amplifier with Max Music Power 4 x 40W Bass / Treble / Fader / Balance / X-Bass / Multi-Band EQ

DISPLAY

DOT Matrix White

PROTECTION

Detachable Front Panel

BLUETOOTH FUNCTION

Hands-Free (HFP)
Audio Streaming (A2DP & AVRCP 1.3)
Bluetooth Class 2
3 Meters Range (free space)

CONNECTION

ISO Connector (built-in)
AM/FM: DIN Female Connector (built-in)
DAB/DAB+: SMB Male Connector (built-in)
USB 1.1 Full Speed (5V — 1A max)
microSD (HC) reader
Front AUX IN


GENERAL

Temperature Range -30° to +85°C Power Supply 12V DC 15A fuse built-in Speaker impedance: 4-8 Ohm Red color for button and volume knob

PACKAGING

214 mm x 97mm x 207mm (gift box) Weight: 1.2 Kg Front Panel with Carrying Case Owner's Manual (IT/EN/DE/FR) Mounting Tools

Wiring Diagram

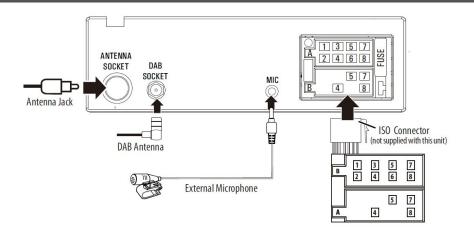



CALEARO ANTENNE S.p.A. Via Bacchiglione, 49 - Z.I. Fossanigo Nord 36033, Isola Vicentina (VI) - ITALY
Tel. (+39) 0444 901311 - Fax (+39) 0444 901375
info@calearo.com — www.calearo.com