




DGC24SIDE



Camera versatile **Front/Rear/Side** selezionabile. Alimentazione **12/24V**.

Chassis in metallo resistente agli urti.

Connettore **RCA** e prolunga **10m** in dotazione.

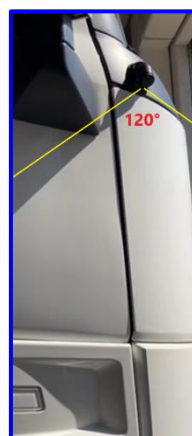

CCD	1/3 Sony 2090+639 CCD
Effective Pixel	NTSC: 1020Hx508V(52Megapixel)
Effective Pixelsignal system	NTSC
horizontal Resolution	600TVL
Minimum illumination	0.01LUX/F1.2
Noise Reduction	2DNoise Reduction (2DNR)
WDR	WDR (0-60)
Minimum illumination	0.01LUX/F1.2
S/N Ratio	≥48dB
backlight compensation	BLC/HLC
Auto Iris	VIDEO/DC
shutter speed	1/50(1/60) - 1/1000000 s
Audio	optional
Video Output	1.0Vp-p/75Ω
Power Supply	DC12V - 24V
Operation Temperature	-20°C--60°C