






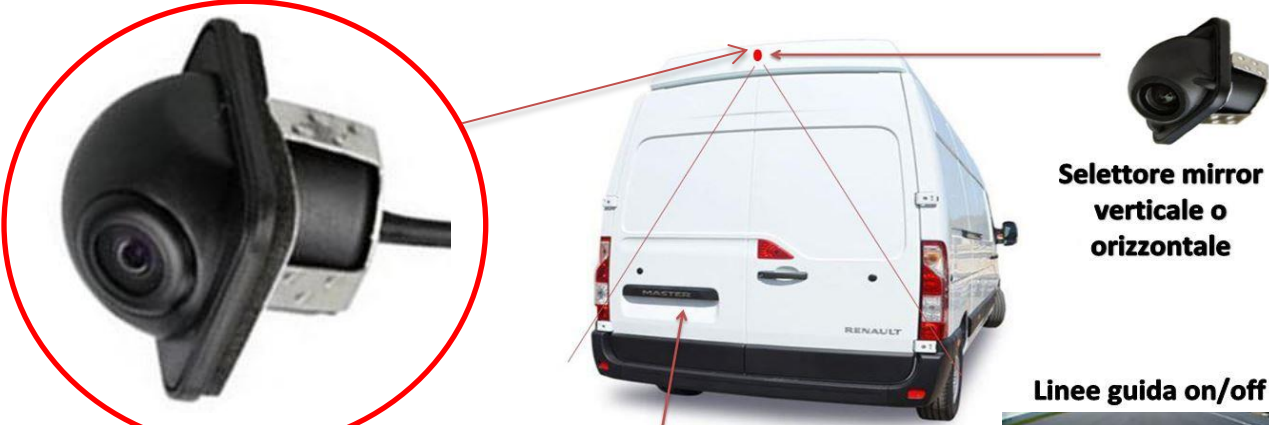


DGC771P

RETROCAMERA UNIVERSALE A FORO

RETROCAMERA A FORO UNIVERSALE. IL FILO BIANCO SERVE PER SELEZIONARE L'INVERSIONE DELL'IMMAGINE SOTTO/SOPRA, IL FILO ARANCIONE PER L'INVERSIONE DESTRA/SINISTRA. IL FILO VERDE PERMETTE DI INSERIRE O ELIMINARE LE LINEE GUIDA COLORATE ON/OFF. FRESA IN DOTAZIONE. SI FISSA IN ALTO NEI MEZZI COMMERCIALI IN MODO CHE L'OCCHIO GUARDI VERSO IL BASSO OPPURE SI FISSA A LATO DELLA LAMPADA DI ILLUMINAZIONE TARGA. SI ALIMENTA TRAMITE IL SEGNALE CHE VA ALLA LAMPADINA DI RETROMARCIA. 12V. DGC771 SISTEMA **PAL**

RETROCAMERA DGC771P	CARATTERISTICHE
<p data-bbox="607 564 1128 592"><u>PUO' ESSERE INSTALLATA FRONTALMENTE</u></p>  <p data-bbox="1305 762 1514 863">Selettore mirror verticale o orizzontale</p>  <p data-bbox="1279 978 1518 1005">Linee guida on/off</p>  <p data-bbox="192 1074 707 1101">INSTALLAZIONE IN MODALITA' VERTICALE</p>  <p data-bbox="271 1345 633 1372">CAVO RCA 5m IN DOTAZIONE</p>  <p data-bbox="1182 1305 1536 1370">INSTALLAZIONE IN MODALITA' ORIZZONTALE</p> 	<p data-bbox="1570 564 2040 632">20mm con <u>mirror verticale on/off</u> <u>mirror orizzontale on/off, linee on/off</u></p> <p data-bbox="1570 644 1984 711">camera, Night vision Color camera RH95%MAX</p> <p data-bbox="1570 724 1883 751">Image sensor: 1/4 PC7070</p> <p data-bbox="1570 764 1753 791">TV system: PAL</p> <p data-bbox="1570 804 1872 831">Effective pixels: 640*480</p> <p data-bbox="1570 844 1995 871">Horizontal resolutions: 480 TV lines</p> <p data-bbox="1570 884 1995 951">Wide-angle: 170 Degree ,horizontal angle:85 Degree</p> <p data-bbox="1570 963 1939 991">Sensing area: 3.8 mm *2.9 mm</p> <p data-bbox="1570 1003 2029 1031">Shutter speed: 1-1/12000,Gamma no.:0.45</p> <p data-bbox="1570 1043 1827 1070">Waterproof rate:IP67</p> <p data-bbox="1570 1083 2040 1142">Minimum illumination:0.01 Lux/F=1.2(0 Lux with IR on)</p> <p data-bbox="1570 1155 1962 1222">Video output: RCA connector 5m RCA cable, 1.0 VP-P,75 OHM</p> <p data-bbox="1570 1235 1917 1262">Power consumption: 130mA</p> <p data-bbox="1570 1275 1827 1302">Power supply: DC12V</p> <p data-bbox="1570 1315 1939 1382">Operating temperature: -20°C - 75°C, RH 95% MAX</p> <p data-bbox="1570 1394 1973 1422">Storage temperature: -40°C- 80°C</p>