




Installation Process

Electric tail gate lift system

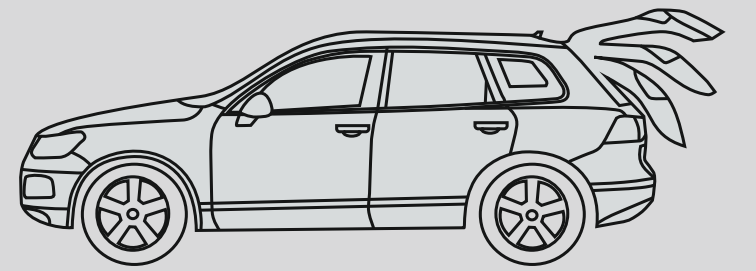

NO:5656171010000



NOTE

Installation Precautions of Electric Tail gate Lifts

- To ensure safety and normal usage of our products, please let the professional sales staff to install; to avoid damaging the machine or causing accidents, please do not dismantle the products.
- To start the engine before installation, check the car dashboard display function, whether the buttons operate normally, whether there is any scratches on car interior and surface. If any problems, reflect to the customer immediately.
- Check whether the tailgate can normally open and close or not, check if there is any problem with the lights.
- Turn off the engine, prepare tools.
- For installation personnel: please remove metal objects and any other hard objects to prevent car damage during the installation process.
- Remove automotive components and place them carefully to avoid scratching the dashboard; wiring debris need to be tidied up in time, do not leave them in the car; Joints must be well insulated to prevent short circuits.
- According to our wiring way, to avoid affect the car moving parts, such as steering column, the accelerator and brake pedals, etc., each harness should be fixed after wiring, to avoid getting loose.
- Connect each harness according to our wiring way (pay attention to the position of ground wire).
- Do not change the wires or accessories with the power on.

▲After installation, close the tail gate manually, so that the system can initialize.

Cable Instruction

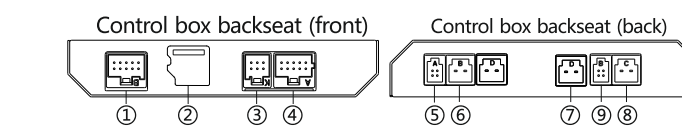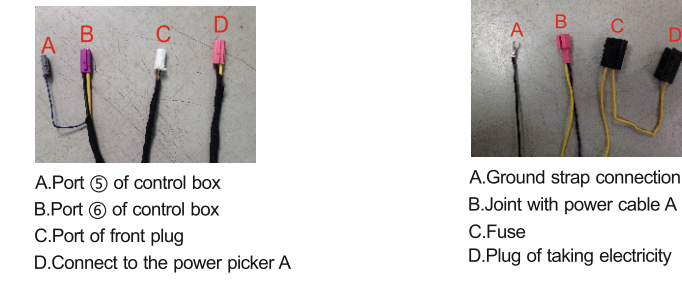

▲All above is subject to change without prior notice. All rights reserved.

Installation Steps

- Dismantle the plaque by tool
- Taking out the plaque (as shown)
- Take out the plug
- Take out the original plug of lock and plug of button
- Joint with control line of the latch with the plug of original lock, joint with the switching cable of button with the plug of original button
- Take out the original gas spring by tools
- Dismantle original rubble plug (as shown) and install our poles
- Dismantle the nail (as shown) by tools

▲Car remote control operation: long-press the trunk button

Installation Steps

- Dismantle plaque by tool
- Dismantle the screws (as shown)
- Dismantle the screws (as shown)
- Dismantle the screws (as shown)
- Take out the original joint of water pipe (Please be careful)
- Take out the original joint of water pipe (Please be careful)
- Take out the original plug
- Take out the original plug

Installation Steps

- Take out the original plug and take off the car tail (as shown)
- Remove the fixed screws by tool
- Remove the fixed screws by tool
- Layout the cables as shown
- Let our wire harness through to the waterproof rubber hose
- Dismantle the rubber buckle
- Layout our cables along to the plaque

Installation Steps

- Dismantle the original plaque by tool
- Dismantle the screw of plaque by tool
- Dismantle the plaque
- Pry out the plaque by tool
- The way of layout the cables as shown
- The position of picking power on the right of trunk
- The installation position of control box
- The installation position of rear button